



EPG-28395 Planetary Series


(24VDC STANDARD)

OUTPUT POWER: 3.4W(APPROX)

WEIGHT: 120~160g(APPROX)

Typical applications: Automat, electrical controlled valve, robot, door locks, token, optical equipment, cordless power tool, ticket selling machines, automatic energy saving bath, monitoring cameras, lighting.


MOTOR CHARACTERISTICS

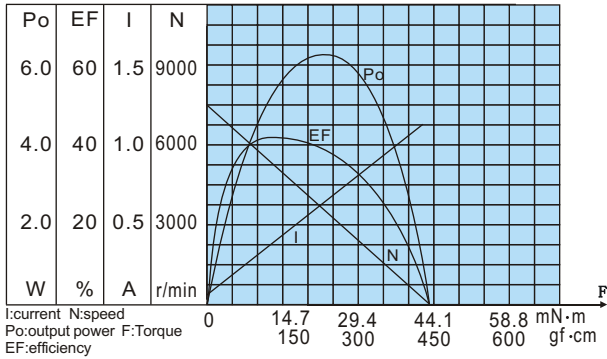

MOTOR TORQUE/SPEED/CURRENT

Rated voltage	24VDC
No load speed	6000r/min
No load current	60mA
Rated torque	77.3gf·cm 7.58mN·m
Rated current	0.266A
Rated speed	4910r/min
Stall torque	430gf·cm 42.14mN·m
Stall current	1.22A

APPEARANCE SIZE

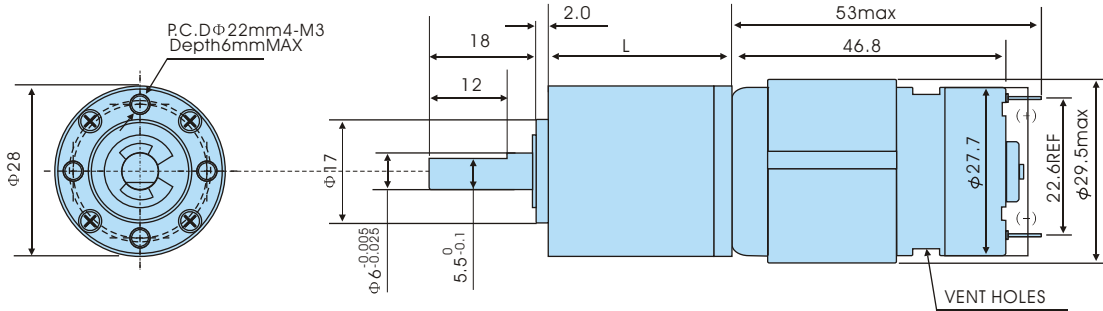

GEARED MOTOR TORQUE/SPEED/CURRENT

Geared motor name	Rated Volt. V	No Load		Load torque				At maximum efficiency		Output power W	Number of gear trains	Gearbox length "L" mm
		Current mA	Speed r/min	Current mA	Speed r/min	Torque		Kg·cm	N·m			
						Kg·cm	N·m					
EPG-28395246000-4K	24	≤60	1500	≤266	1227	0.28	0.03	0.8	0.08	3.4	1	25.3
EPG-28395246000-16K	24	≤60	375	≤266	307	1.0	0.1	3.0	0.29	3.1	2	25.3
EPG-28395246000-22.5K	24	≤60	266	≤266	218	1.4	0.14	4.0	0.39	3.1	2	25.3
EPG-28395246000-64K	24	≤60	93	≤266	76.7	3.6	0.35	11	1.08	2.8	3	30.3
EPG-28395246000-90K	24	≤60	66	≤266	54.6	5.1	0.50	15	1.47	2.8	3	30.3
EPG-28395246000-107K	24	≤60	56	≤266	45.9	6.0	0.59	18	1.76	2.8	3	30.3
EPG-28395246000-256K	24	≤60	23	≤210	20.2	10	0.98	30	2.94	2.0	4	35.3
EPG-28395246000-304K	24	≤60	19.5	≤180	17.4	10	0.98	30	2.94	1.7	4	35.3
EPG-28395246000-361K	24	≤60	16.5	≤170	16.6	10	0.98	30	2.94	1.6	4	35.3
EPG-28395246000-428K	24	≤60	14	≤140	12.8	10	0.98	30	2.94	1.3	4	35.3
EPG-28395246000-509K	24	≤60	11.7	≤120	10.9	10	0.98	30	2.94	1.1	4	35.3
Note	Voltage can make as customers' request											
Packing Details	CTN size: 41X26XH23CM 100PCS/CTN N.W.12Kgs											